SPECIFICATION



12.90 m / 42' 4"

2.25 m / 7' 5" 2.58 m / 8' 6" 2.48 m / 8' 2" 1.85 m / 7' 1"

3.50 t / 7,716 lbs 3.15 t / 6,944 lbs 3.35 t / 7,385 lbs 3.85 t / 8,488 lbs

TECHNICAL DATA

HULL LENGTH

DRAUGHT (DWL)

standard competition L-keel deep shallow keel

BALLAST

DISPLACEMENT

LOA

LWL

BEAM



11.50 t / 25,353 lbs 11.20 t / 24,691 lbs 11.40 t / 25,132 lbs 11.90 t / 26,235 lbs standard competition L-keel deep shallow keel **ENGINE APPROX.** FRESH WATER approx. 450 l/119.00 gal **FUEL TANK** approx. 200 l/53.00 gal MAST ABOVE WL **TOTAL SAIL AREA** 116.73 m² / 1,256 sq ft 126.79 m² / 1,365 sq ft standard competition MAIN SAIL standard competition $64.10 \; m^2 \, / \, 690 \; sq \; ft \\ 70.52 \; m^2 \, / \, 759 \; sq \; ft$ **FURLING JIB 105%** $52.63 \text{ m}^2 / 567 \text{ sq ft}$ $56.27 \text{ m}^2 / 606 \text{ sq ft}$ standard competition **SPINNAKER GENNAKER** 185.38 m² / 1,995 sq ft 214.00 m² / 2,303 sq ft standard competition FREERIDE 120.38 m² / 1,296 sq ft 128.50 m² / 1,383 sq ft RIG standard I 18.10 m / 59' 5" J 5.50 m / 18' 1" P 17.68 m / 58' 0" E 6.25 m / 20' 6" I 18.90 m / 62' 0" J 5.50 m / 18' 1" P 18.70 m / 61' 4" E 6.55 m / 21' 6" CE CERTIFICATE

DESIGN


INTERIOR

All measurements/figures are approximate. Errors and omissions excepted. Specification and material can be changed without notice. Valid from 2023.07.01 for deliveries until 2024.12.31.


DECK AND INTERIOR LAYOUTS Dehler 46 50




DECK LAYOUT

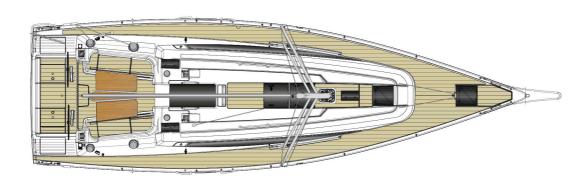

INTERIOR LAYOUT

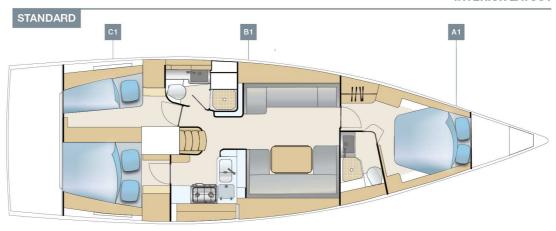


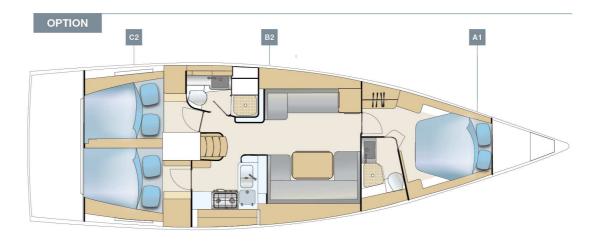

DECK AND INTERIOR LAYOUTS Dehler 46 50



INTERIOR LAYOUT

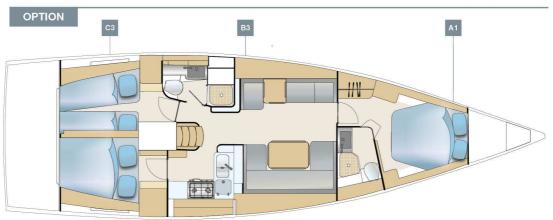

STANDARD SPECIFICATION



HULL

- 6 hull windows (3 each side)
- GRP hull, isophthalic gelcoat, colour: Signal White (similar RAL 9003), 1st layer vinylester resin with PVC foam core built in vacuum infusion
- Waterline and cove line, isophthalic gelcoat, colour: Dark Blue (similar RAL 5004)

KEEL

- L-keel, cast iron, draft: 2.25 m
- GRP rudder with sea-water resistant aluminium shaft and selfaligning bearings

LAYOUT & INTERIOR

- A1: Master cabin with island double berth, storage space and a head with separate shower stall
- B1: Saloon with L-galley, dining area on stb, long sofa and head with separate shower stall on port
- C1: 2 aft cabins: single berth with locker and storage on port and double berth with locker and storage on stb
- 3-burner gas stove, waste bin, 12 V fridge approx. 130 I, double stainless steel sink with mixing tab
- Interior furniture in high quality marine plywood, satin varnish
- Dehler companionway closing system
- Saloon table, folding with stowage
- Worktop in galley, Off White
- Indirect lights in saloon
- SLS Scenario light system touch screen controller and dimmer in saloon and master cabin

WOOD (FURNITURE, FLOORBOARD)

- Furniture Mahogany
- Floorboard Australian Acacia

UPHOLSTERY

- Mattrasses for all berths
- Upholstery Baltic, colour: creme
- Upholstery Piping (colour selection)

DECK & OUTSIDE EQUIPMENT

- GRP deck with antslip surface, isophthalic gelcoat, colour: Signal White (similar RAL 9003), 1st layer vinyl ester resin with balsa sandwich core. Cockpit lockers, stern lockers on port and stb, anchor locker at bow.
- Cockpit bottom, gelcoat colour: Signal White (similar RAL 9003)
- Synthetic teak on coach roof (colour selection)
- Synthetic teak on cockpit benches (colour selection)
- Twin wheel steering system with emergency tiller
- 2 stainless steel steering wheels with leather cover
- Pulpit and pushpit, stainless steel
- Railing, incl. stanchions and stainless steel wire
- Halyards and control lines with organizers and jammers on coach roof, 4 retractable mooring cleats, handrails on coach roof
- 2 LEWMAR 50 Race manual halyard winches
- 2 LEWMAR 50 Race manual secondary winches

- 2 LEWMAR 50 Race manual
- mainsheet winches
- Swimming ladder
- Rub rail, aluminiumLED backlighted design part on the
- coach roof
- Helmsman footrests, foldable
- Anchor windlass, electrical with automatic fuse
- Composite bowsprit with integrated anchor fitting
- Genoa tracks, incl. cars, adjustable from cockpit
- German mainsheet system with adjustable traveller
- 6 deck hatches openable, anchor locker hatch
- 8 deck coach roof windows openable, portlights in cockpit sides for aft cabins

RIG & SAILS

- Rig, anodized aluminium, keel stepped incl.: dyform rigging, running rigging, kicker, manual jib flat deck furler, "Dehler Quick Reefing System", hydraulic backstay tensioner
- QUANTUM AC5 performance sails full battened, triradial, main and jib
- Dyneema halyards for main and jib

NAVIGATION & INSTRUMENTS

- 2 illuminated compasses at steering pedestal
- Navigation lights LED

PROPULSION

- Fuel tank, approx. 200 l
- Engine (Diesel, approx. 57 hp) saildrive, 3 blade folding propeller

EQUIPMENT

- 12 V and 230 V electric system with main panel, 12 V and 230 V socket and 230 V shore power
- AGM battery set capacity: Starter battery: 1 x 90 Ah, service battery: 1 x 160 Ah
- Country Version: EU / AUS
- Battery charger 35 A
- Manual toilet with sea water flush cabin layout B
- Manual toilet with sea water flush cabin layout A
- Shower unit in cockpit, warm-/coldwater
- LPG gas system, stowage for 1 bottle
- Manual and electric bilge pump
- Black water system (appr. 85 l) with deck extraction and seacock for aft head, appr. 35 l in fwd head
- Fresh water system with electric pump and 20 I hotwater, heated also by main
- Fresh water tank, appr. 450 l

SHIPPING & TRANSPORT

- CE Certificate cat. A
- Owners manual
- EC Type Examination Certificate